

# Panasonic

## BUSINESS

IP Proprietary Telephone  
**KX-NT680**  
**KX-NT630**

*Designed for  
 Intuitive  
 Communication*

With the ever-changing business world in mind, at Panasonic we created a new type of communication equipment, ready for the future. Using a clear colour LCD, integrating High Definition Audio and an enhanced user interface, we provide for the needs of current users.



**HD SONIC** **KX-NT680** Colour LCD


### *Intuitive Operation*

Making all information visible at a glance is never easy. By using the highly intuitive colour LCD screen, every detail is visible with colour or icons providing understandable information.



### *Customisation*

The KX-NT680 can import an image file to display on the LCD. Corporate branding or corporate information can be easily brought throughout the organisation by customising the colour LCD screen. During use, the information is visible at all times for the user to understand.



\*In the case of displaying the image of a QR code, it may not be legible with the reading device depending on the size of the QR code.

**KX-NT630**  
 Monochrome LCD



**HD SONIC**


## Other features of the KX-NT680/KX-NT630

# 48 Flexible Function Keys\*

More support for frequently used numbers, features or settings. By using different 'screens', a total of 48 key settings can be registered.

\*Available on the KX-NT680 only. The KX-NT630 supports 6 keys divided over 4 pages, providing a total of 24 flexible keys.

12 Keys x 4 Pages\* (12 Flexible Function Keys)

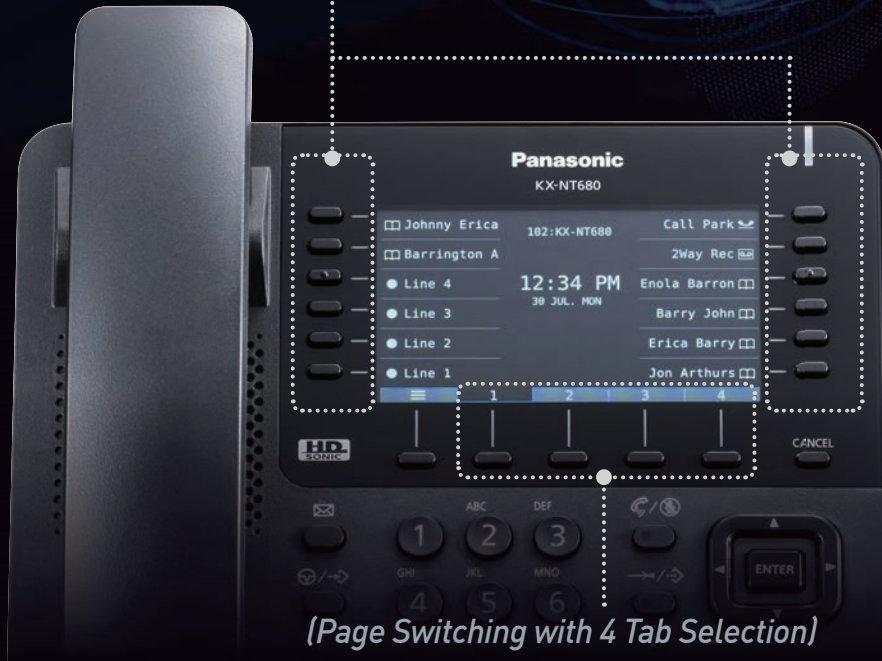

(Page Switching with 4 Tab Selection)

# SRTP Supported

IP communications are becoming more susceptible to attacks. By supporting SRTP we encrypt our communication packets and create a secure and solid communication channel.

# Centralised Management

Setting up a terminal difficult? Not with the centralised management embedded. All settings can be transmitted by the network and adjusted remotely. Administrators on the communication network enable different parameters easily.

## Specifications



**KX-NT680**  
Colour LCD

**KX-NT630**  
Monochrome LCD

### Optional Accessories

- AC Adaptor: KX-A424 • Wall mount kit: KX-A435

### Applicable Communication Server

- KX-NSX Series Version 4.0 or later
- KX-NS Series Version 7.0 or later

### Display Features

- KX-NT680: 480 x 272 pixel Colour TFT LCD
- KX-NT630: 6-Line Monochrome LCD with Backlight
- Customized Image Display\*

### Phone Features

- 12 x 4 pages Flexible Function Key (KX-NT680)
- 6 x 4 pages Flexible Function Key (KX-NT630)
- Self-Labeling for Flexible Function Key

### Interface

- Ethernet port (2 ports)
- PoE (IEEE 802.3af)
- Headset port (2.5 mm pin jack)
- EHS supported\*
- Bluetooth® (Built-in)\*

### Others

- Operating Environment: 0°C - 40°C
- Dimensions (W x D x H mm)\*\*:
  - KX-NT680: 220 x 185 x 189 (High Position)  
220 x 187 x 156 (Low Position)
  - KX-NT630: 205 x 185 x 189 (High Position)  
205 x 187 x 156 (Low Position)
- Weight\*\*:
  - KX-NT680: 930 g, KX-NT630: 900 g

\* Available on KX-NT680 only.

\*\* Includes Handset.

### Important

-Safety precaution: Carefully read the operating instructions and installation manual before using this products.

- The Bluetooth® word mark is a registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Panasonic is under license.
- Some models will be available to limited countries.
- The images shown of the base unit display and light are composite images.
- Weights and dimensions are approximate.
- Design and specification subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY :

CommsPlus Distribution  
Unit 19, 114-118 Merrindale Drive  
Croydon VIC 3136, Australia

**CommsPlus**  
DISTRIBUTION

**Panasonic**

Phone: 03 9872 2999  
Email: sales@cp-d.com.au

MG-PBXL017EN 1809NSP/ZZZ-1